

Lounge Seating: including; Assymble, Dialogue, Kadia, Cascade, Koncert, Odeon Series

What to expect:

Disassembly Time: 15-20 minutes per chair (General)

(allow additional 20-30 minutes for detailed component disassembly)

Tools needed: Protective Equipment (Safety Glasses)

Wrenches/Ratchet w/sockets (7/16")

Screwdrivers (Phillips #2 - #3)

Utility Knife (to save time and minimize risk of injury, cut around upholstery staples, when possible)

Material Content:

Wood

Metal (♻️ steel)

Poly Foam

Textile (fabric/vinyl)

Component Content:

Upholstered Arms: (plywood frame w/staples, poly foam, textile w/staples (fabric/vinyl), legs (solid wood or (♻️ steel),

Upholstered Base (Seat/Back): (plywood frame w/staples, seat springs (♻️ steel), poly foam, textile w/staples (fabric/vinyl)

Hardware: (bolts/screws (♻️ steel))

Lounge Series:

Leg Removal:

- Place unit "upside down", remove mounting bolt (1/2" socket) for each leg



Arm Removal:

- With unit upside down, use utility knife to cut the black material to allow access to mounting bolts

.....

- Remove (4) mounting bolts (*phillips screw driver*) from the inside edge of each arm and separate from base



Seat Springs Removal:

- Place unit on it's back and use utility knife to cut around staples on each end (see yellow broken line)
- Cut the black denim across the back inside rail (see far right photo), then pull back edge of seat foam forward (this will allow access to seat springs for recycling (♻️ steel))




Lounge Series: (con't)

Chassis Base:

Back Removal:

- Place unit on it's back and using 1/2" socket and/or wrench to remove (4) (nyloc) locking nuts from mountings bolts and remove back
.....
- Remove seat panel assembly using phillips screw driver to remove (4) mounting bolts and remove seat assembly, recycle both arm and chassis (♻️ steel)

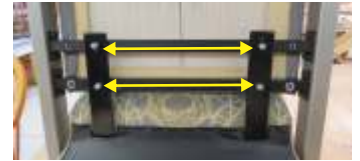

Arm Cap:

- Remove (3) mounting screws (each arm)

